


impulse

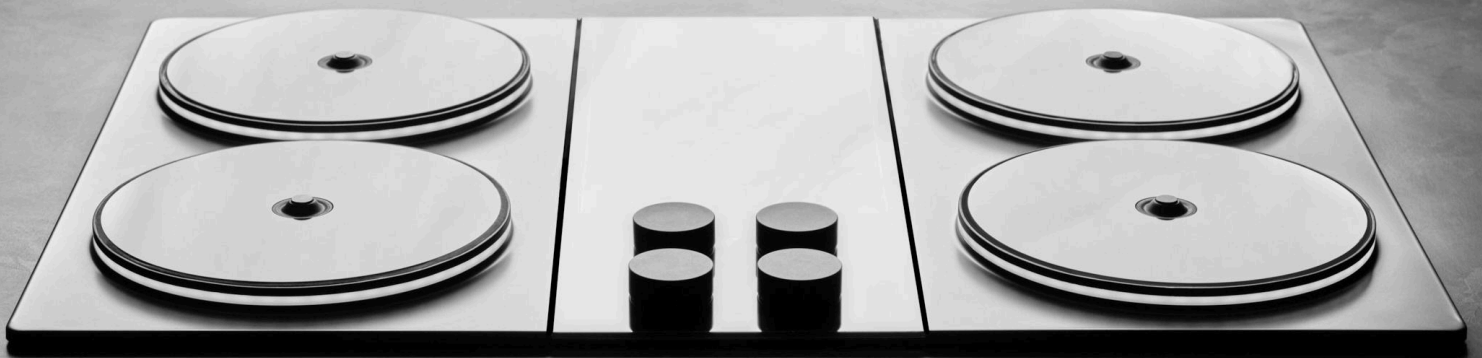

Induction Cooktop

Technical Specifications &
Installation Guidelines

Induction Cooktop

PRODUCT SIZE & SPECIFICATIONS

Overall Width	30"
Overall Depth from Rear	21"
Overall Height	
Above top surface of counter	1 1/8"
Below top surface of counter	6.5"
Burner Diameter [4]	9"
Max Power Capacity	10 kW per burner
User Interface	LCD Display Removable Magnetic Knobs LED Burner Rings
Battery Capacity	3 kWh

CUTOUT SIZE

Cutout Width	28 1/2" - 29 1/2"
Cutout Depth	19 5/16" - 19 5/8"
Clearance from Rear Wall	2 1/2" [minimum]
Clearance from Front Edge of Counter	3" [minimum]
Clearance from Cabinetry on Counter Next to Cooktop	3" [minimum]

INSTALLATION SPECIFICATIONS

ELECTRICAL

- 120V and 240V compatibility
- Inverter can support up to 2 kW pulled from AC grid

MILLWORK / PHYSICAL CONSTRAINTS

- Ventilation hood must be 30" [minimum] above the surface of the burners.
- Cooktop must not be installed above refrigerators / freezers, dishwashers, or washer / dryers.
- We recommend no cabinets directly above the cooktop, but it is possible.
- Note that additional ventilation clearances will be required below the cooktop.
- We recommend installing an open cabinet below the stove [e.g. for trash bins and storage] for easy access underneath and full ventilation. A drawer at ground level is also an option.

